



FULL MODULE UNIT - 1 LARGE SOLID TOP

ELECTRIC OVEN GN 2/1

Pro 900

Summary

Energy :

GAS

Code :

V01536

Designation :

M1PL

Dimensions (W x D x H) :

850 x 900 x 900 mm

Power : 12 kW (gas)

Voltage/Electric p. : 3~400V+N+E / 5

Weight :

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



1 baking tray :

- . Cast iron solid top measuring 845 x 600 mm.
- . "crown" burner rated 12kW, with flame failure safety cut out thermocouple - Pilot ignition.
- . "Stop - ignition - full fire - idle" valve with backlash adjustment.
- . Removable refractory elements in stainless steel formwork.

Base : GN 2/1 static electric oven

- . measuring L : 650 x D : 530 x H : 300 mm
- . Floor and vault heating by 3 ~ 400V + N + E resistors, power : 5 kW
- . Switch and regulation thermostat 50 - 300 ° C + indicator lights oven power on signal.
- . Steel hearth 4 mm thick - stainless steel muffle with high density insulation.
- . Removable runners in enamelled steel with 3 slide levels 70 mm apart.
- . Door and storm door in 18-10 stainless steel, with high density insulation, enamelled steel handle on anodized aluminum supports, ensuring the thermal break, enamelled handle on anodized aluminum supports, ensuring the thermal rupture.
- . 1 GN 2/1 nickel coated oven shelf with anti tilt supports.

Natural gas flow G20/20 :

1,27

Propane gas flow G31/37 :

0,93

OPTIONS

CODE

Electric spark ignition 1-230V+E/0,002 Kw

V01013

S/S rear panel fitted in factory W : 840 x H: 645 mm

V01182






ACCESSORIES

CODE

S/S clip on plinth panels H : 170 mm for standard legs

V01187

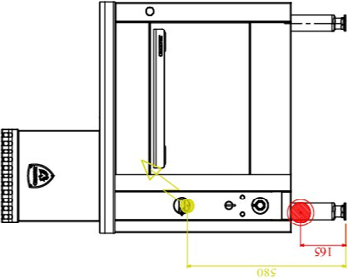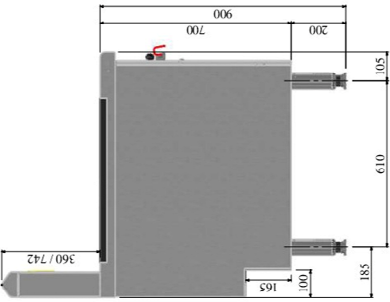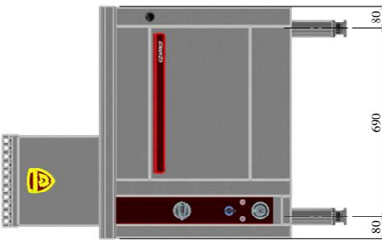

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica	 Options Optionen Ausstattung Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie Softened water connection Weichwasseranschluss Conexión agua suavizada ≤ 3bars-7°F Wasserzulauf (gef. filtertes wasser) ≤ 3bars-7°F (°H) Conexión agua suavizada ≤ 3 bars-4.7°F	 Ecoulement eaux usées sewage outflow wasserlauf drenaje
						 + 2.50m de câble électrique.
					 Ø 15x21 (1/2")  1~230V + PE Ø 1.50mm²  3~400V + PE  	
						V01536 PRO000M1PL



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr

