

### GENERAL DESCRIPTION

#### Chassis:

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

#### - Top:

AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 320/380

#### - Top :

- . 14l capacity tank, 1 mm thick AISI 304 stainless steel, with cold and heat zones and a 20 mm high edge to prevent debris from falling in the cooking oil
- . Oil level indicator marks
- . Drain tap to front
- . Hinged lid in AISI 304 stainless steel , 1 mm thick AISI 304 stainless steel
- . Electric heating with removable immersed element rated 12 kW

#### Control and safety :

- . On/Off switch, control thermostat and indicator lights
- . Safety thermostat with manual reset
- . Safety micro-switch to secure the position of the immersed element

#### - Accessory :

- . 1 large nickel coated fryer basket

#### - Base :

- . Bridge unit

Electrical rating : 12 kW / 3~400V+E

Output 26 kg/h blanched chips

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :

-






REFERENCE : 1/2 R-E1FR1412

| CODE          | DIMENSIONS          | ALIMENTATION | POWER        | WEIGHT |
|---------------|---------------------|--------------|--------------|--------|
| <b>V01707</b> | 425 X 800 X 320/380 | 3~400V+E     | ELEC : 12 kW | 40 kg  |

| OPTIONS                                      | CODE   |
|----------------------------------------------|--------|
| 150 mm wide plating shelf                    | V00805 |
| Stainless steel rear panel fitted in factory | V01289 |
| -                                            | -      |
| -                                            | -      |
| Equipment for a 24V remote control           | V00878 |
| Terminal block for energy saver device       | V02427 |
| Front electric socket (Requires neutral)     | V02248 |
| 2x1/2 fryer basket to replace 1 large basket | V02214 |
| -                                            | -      |
| -                                            | -      |

| ACCESSORIES                | CODE   |
|----------------------------|--------|
| Fryer basket               | 04062A |
| 1/2 fryer baskets          | 07590A |
| Stainless steel fish plate | F02921 |

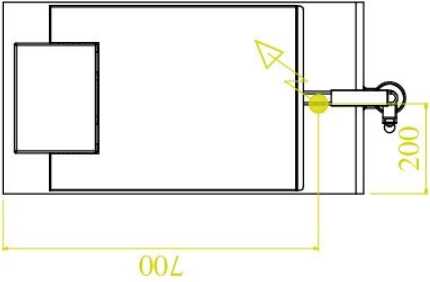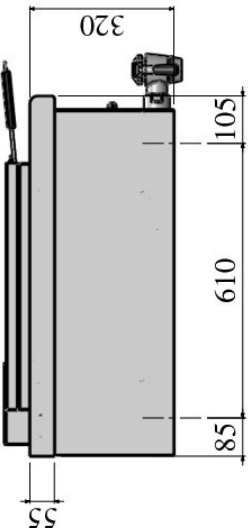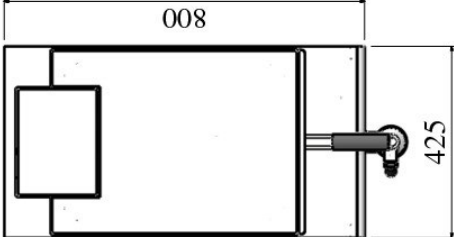

|                                                                                                                                                      |                                                                                                                                                                                  |                                                                                                                                   |                                                                                                                                                                                 |                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>Connexion gaz<br>Gas connection<br>Gasanschluss<br>Conexión gas | <br>Connexion électrique<br>Electric connection<br>Elektrische Verbindung<br>Conexión eléctrica | <br>Options<br>Options<br>Aufanfrage<br>Opciones | <br>Connexion eau froide<br>Cold water connection<br>Kaltwasseranschluss<br>Conexión agua fría | <br>Connexion eau chaude<br>Hot water connection<br>Warmwasseranschluss<br>Conexión agua caliente | <br>Connexion eau adoucie<br>≤ 3bars-t.h...7°F<br>Softened water connection<br>≤ 3bars-7°F<br>Wasserzulauf (gefiltertes<br>wasser ≤ bars-ab: 7°C/GH)<br>Conexión agua blanda<br>≤ 3 bars-t.h...7°F | <br>Ecoulement eaux usées<br>sewage outflow<br>wasserablauf<br>desague                                                                                                               |
|                                                                     |                                                                                                                                                                                  |                                                                                                                                   |                                                                                               |                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                         |
|                                                                   |                                                                                               |                                                                                                                                   |                                                                                             |                                                                                                                                                                                    | <br>3~400V + PE P: 12 kW<br><br>1~230V + PE P: 0,192 kW                                                     | <br><br> |

V01707 PRO800-1/2R-E/FR1412