

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 320/380.

- Top :
. Neutral work top with pull out utensil drawer under for an excluded GN2/1 container.

- Base :
. Bridge unit

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-






REFERENCE : R-TIROIR2/1

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01718	850 X 800 X 320/380	-	-	35 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
-	-
Stainless steel rear panel fitted in factory	V01290
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-

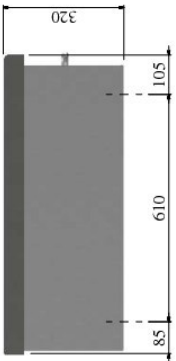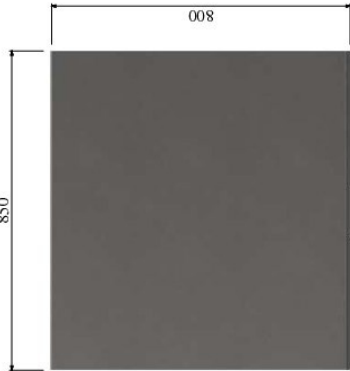

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Options Aufanfrage Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°GH) Conexión agua blanda ≤ 3 bars-t.h...7°F	 Ecoulement eaux usées sewage outflow wasserablauf desagüe
 						
       						
V01718 RO 800 R-TIROIR						