

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 320/380.

- Top :
 - . 2 openwork cast iron griddles measuring 350x500 mm with slots to allow grease to fall into water bath below.
 - . Water spout controlled by a tap in front fitted in the tank to fill up the tank without removing the griddle
 - . Drainage by removable waste upstand (appliance shall be connected to the mains drainage)
 - . Tubular armoured element fitted in a recess underneath the griddle mounted on hinges for easy cleaning.
 - . Control by a 0-100% range simmerstat with 'OFF' position
 - . Light indicator.

- Base :
 - . Bridge unit
 - Electrical rating : 12kW / 3~400V+E

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-






REFERENCE : R-E2GRBE/FTE

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02821	850 X 800 X 320/380	3~400V+E	ELEC : 12 kW	85 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-

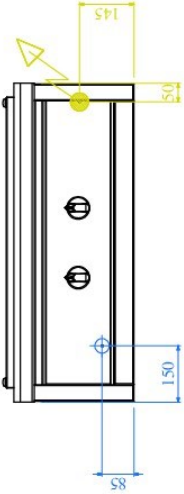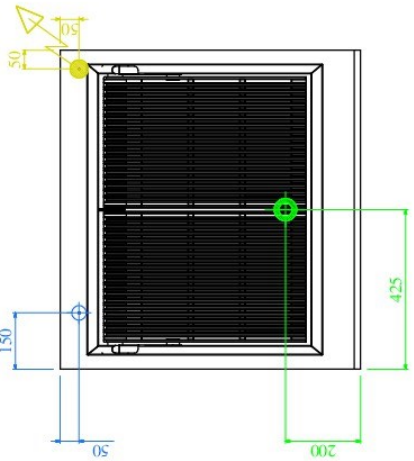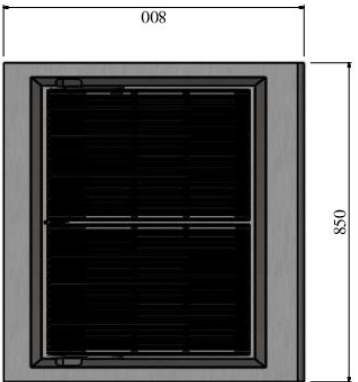

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica	 Options Options Aufanfrage Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F	 Ecoulement eaux usées sewage outflow wasserablauf desagüe
						
					     1~230V + PE P: 12 kW Ø 15x21 (1/2") Ø 32x42 (M1" 1/4")	V02821 PRO800R-E2GRBE/FTE