



FRYERS ENVIRONMENT

AND FILTRATION UNIT

PACK-FR (V01146 + V01150 + V03381)

Pro 1000

Summary

Energy : ELEC	Code : V03415	1/2PACK-FR – EVO
----------------------	----------------------	-------------------------

W x D x H (mm) : 500 X 1000 X 900 mm
Power/Electrical P. : 1~230V+E/ 1 kW

Description of the device

General description

Frame :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds.

Above :

Top (frame) in AISI 304 stainless steel, 30/10 thickness, with 55 mm front flanged edge and counter-fold.

Foot:

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



Above :

- . Neutral AISI304 stainless steel top with cutout and GN1 / 1 container housing (container supplied).
- . Fixed front panel of the same height as the series cooking modules with 1/230 + E 16 A electrical outlet with aluminum frame and flush shutter valve.
- . Temperature maintenance ramp, on 60x30 AISI304 stainless steel tube bracket, made up of two radiant heaters - P : 2kW.
- . Under ceramic hob.
- . Control by thermostat and signaling by LEDs on the front of the device.

Basement :

- . Open storage for 40L mobile oil filter container (ref. V01149 not supplied). The housed mobile bin closes the front of the cupboard.

Natural gas flow G20/20 :

-

Propane gas flow G31/37 :

-

Dimensions (mm) :	Power/Electrical P. :	Power :	Weight :
500 X 1000 X 900 mm	1~230V+E/ 1 kW	1 kW	- kg

OPTIONS

CODE





Front electric socket - 1~230V+E - Fitted in factory	Included
Built in chip container GN1/1 x 200 mm - removable perforated bottom sheet	Included
Ceramic heat ramp [3] - 1~230V+E / 1,5 kW - fitted in factory	Included
S/S rear panel fitted in factory - W : 490 x H : 645 mm	V01184
-	-
-	-
-	-
-	-
-	-

ACCESSORIES

CODE

-	-
-	-
-	-

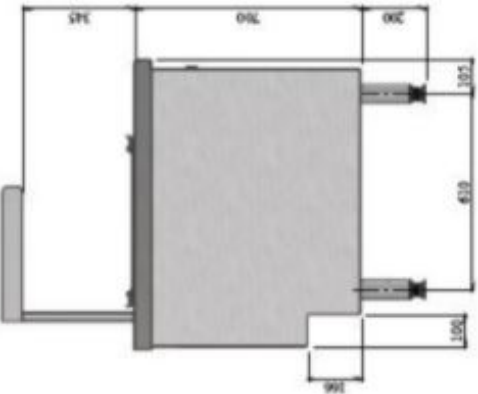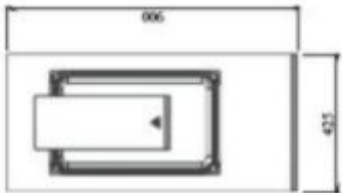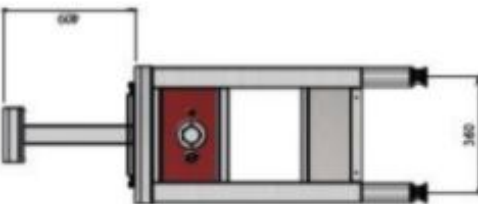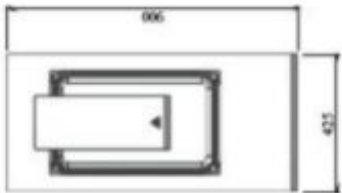

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Optionen Ausstattungs Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie Softened water connection Wasserschäufel (gerolltes Wasser) ≤ 3 bar-13...77 Connexion agua blanda ≤ 3 bar-13...77	 Écroulement sous pression Collapse under pressure Versinken unter druck
 						
 						
    						
1-230V + PE Ø1.50mm²						
V63414 PRO900-1/2PACK-FR-EVO						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

