



FULL MODULE UNIT - STEEL PLANCHA

OPEN BASE

Pro 900

Summary

Energy :
GAS

Code :
V03515

Designation :
B-G1PL/ACR/RUIS

Dimensions (W x D x H) :
850 x 900 x 900 mm
Power : 16,5 kW (gas)
Voltage/Electric p. : 1~230V+E / 0,02
Weight :

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



Above :

- . 1 smooth plancha (contact cooking plate): steel plate with dimensions: 700 x 500 x 20 mm, flush.
- . Multi - ramp burner 8 branches in enamelled steel, power 16.5 kW with pilot light and thermocouple safety.
- . Slack adjustment "stop - ignition - full fire - idle" valve.
- . Peripheral groove with radiated angles and drain plug with removable overflow, water flow (drainage connected to the ground to be provided).
- . Electric ignition included.
- . Emptying into tank (option).
- . Sealing by penetrating the edge of the groove on the underside of the plancha.

Below:

- . Free bay with removable floor in 2 parts.

Natural gas flow G20/20 :

1,64

Propane gas flow G31/37 :

1,2

OPTIONS

CODE

Elec hot cupboard 4xGN2/1 in base 3~400V+N+E / 2,25 kW - therm.

V00826

Hinged doors for open base

V01576

Draining in drawer for bridge unit only - Without water flushing

V03544

Drain pipe + tank in base for 2 chrome griddles or 1 plancha

V03545

Electric spark ignition 1-230V+E/0,002 kW

Included

S/S rear panel fitted in factory W : 840 x H : 645 mm

V01182

ACCESSORIES

CODE






Removable splash guard for 1 griddle

V02597

S/S clip on plinth panels H : 170 mm for standard legs

V01187

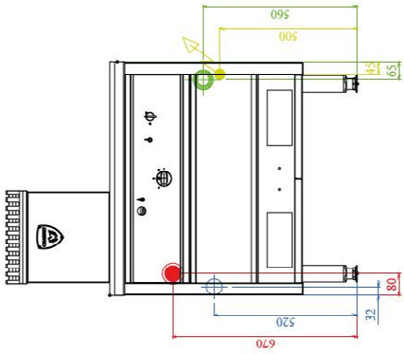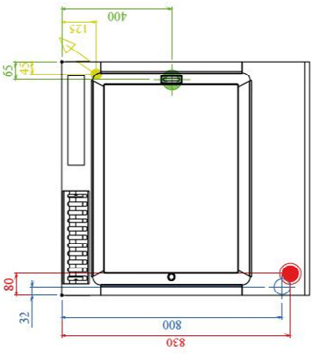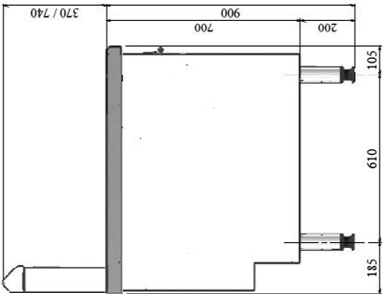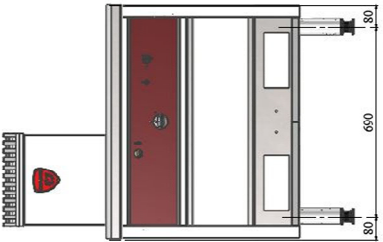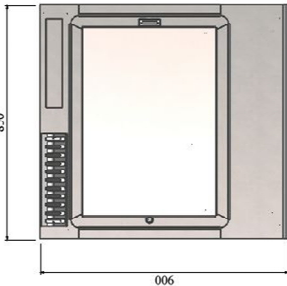

 Conexión gaz Gas connection Gasanschluss Conexión gas	 Conexión eléctrica Electric connection Elektrische Verbindung Conexión eléctrica	 Options Optionen Aufträge Opciones	 Conexión eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Conexión eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Conexión eau adoucie Soft water connection Weichwasseranschluss Conexión agua blanda ≤ 3 bars - 1/2" - 7°F ≤ 3 bars - 7°F Wasserzulauf (gefäilteres water ≤ bars-ab. 7°F) Conexión agua blanda ≤ 3 bars - 1/2" - 7°F	 Ecoulement eaux usées sewage outflow wasserablauf desague
					      Ø15X21 (1/2") 1~230V+PE Ø1.5mm ² Ø15X21 (1/2") Ø40X49 (1"-1/2")	Y03515 PRO500-B G1-PLANCHA-70/50 RUISSELEAU



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

