



FULL MODULE UNITS - STEEL GRIDDLE - LM 2

OPEN BASE

Pro 800

Summary

Energy :

GAS

Code :

V03568

Designation :

B-G1-GRIL-DOUBLE-ACIER

Dimensions (W x D x H) :

850 x 800 x 900 mm

Power : 16 kW (gas)

Voltage/Electric P. : 1~230V+E

Weight :

APPLIANCE DESCRIPTION

General description

Chassis :

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

Assembly by high intensity electric welding.

Top :

AISI 304 stainless steel top frame, 3 mm thick, with a 55 mm high edge and return to underside.

Legs :

200 mm high AISI 304 stainless steel legs, diam. : 60 mm. Adjustable PVC feet (0 / + 30).



Above :

- . Smooth steel plate 670 x 570 mm, 20 mm thick.
- . With integrated splashguard.
- . 2 independently controllable heating zones - unit power : 6 kW.
- . Controlled by thermostat on the front.
- . Removable stainless steel drainage on the front of the plate.
- . Plate available in grooved and mixed version. Below : open base : 850 x 800 x 900 mm.

Natural gas flow G20/20 :

Propane gas flow G31/37 :

OPTIONS

CODE






150-mm wide plating shelf - integrated into the top	V00806
Electric hot cupboard 4xGN2/1 in base - 3-400V+N+E/2,25 kW-therm. 0-30/110°C	V00826
Hinged doors - for open base	V01813
S/S rear panel fitted in factory - L: 840 x H: 645 mm	V01182
100% ribbed plate	V03595
1/2 smooth + 1/2 ribbed plate	V03597

ACCESSORIES

CODE

S/S clip on plinth panels - H : 170 mm for standard legs	V01187
Removable splash guard - For 1 griddle	Included

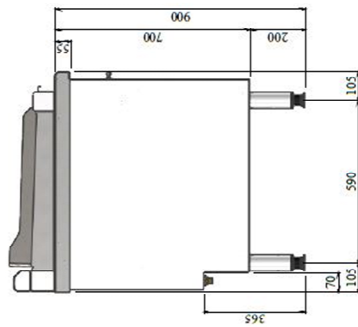

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische verbundung Conexión eléctrica	 Options Options Aufträge Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie Softened water connection Softened water connection Wasserlauf (gefiltertes water ≤ bar-ab. 7"GF) Conexión agua blanda ≤ 3 bar-ab. 7"GF	 Ecoulement eaux usées sewage outflow wasserablauf desague
 						
  						
     Ø15/21 (1/2") V03568 PRO800-B-G1-GRIL-DOUBLE-ACTIER						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

