



HALF MODULE UNITS - 2 INDUCTION HOBS - 2 X 5

OPEN BASE

Pro 800

Summary

Energy :

ELEC

Code :

V03599

Designation :

B-E2IND5000

Dimensions (W x D x H) :

425 x 800 x 900 mm

Power : 10 kW (elec)

Voltage/Electric P. : 3~400V+N+E

Weight :

APPLIANCE DESCRIPTION

General description

Chassis :

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

Assembly by high intensity electric welding.

Top :

AISI 304 stainless steel top frame, 3 mm thick, with a 55 mm high edge and return to underside.

Legs :

200 mm high AISI 304 stainless steel legs, diam. : 60 mm. Adjustable PVC feet (0 / + 30).



Above :

. 1 set of 2 induction zones (diameter 220 mm per zone for a pan with a minimum diameter of 120 mm) under a flush vitroceramic plate 325 x 650 mm, 6 mm thick.

. Mounting of coils / generators on a slide to facilitate access during maintenance operations.

. Front controls by potentiometers with stop positions, graduated marks from 1 to 12.

. Indicator lights for operation and possible faults.

Below :

. Open base with removable AISI304 stainless steel floor.

. Power: 2 x 5kW in 3ph 400v + N + E.

Natural gas flow G20/20 :

Propane gas flow G31/37 :

OPTIONS

CODE

150-mm wide plating shelf - integrated into the top

V00805

Hinged doors - for open base closure

V01937

Power 2 x 3,5 kW

V03630

S/S rear panel fitted in factory - W : 415 x H : 645 mm

V01181





ACCESSORIES

CODE

S/S clip on plinth panels - H : 170 mm for standard legs

V01186

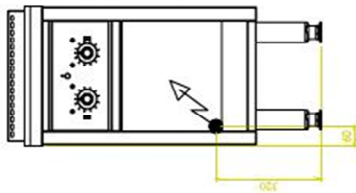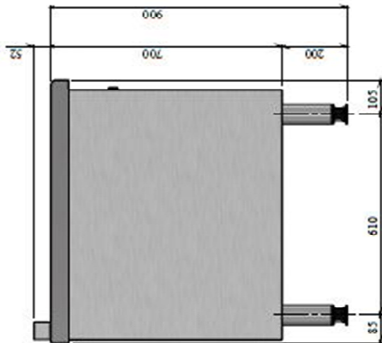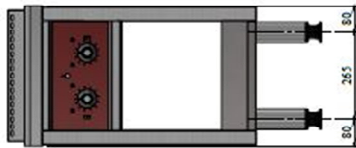

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Options Auftrags Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion au réseau 3 bar-1 h Softened water connection ≤ 3 bar-7°F Wasserlauf (geföhertes water ≤ 3 bar-7°F) Conexión agua ≤ 3 bar-1 h, 7°F	 Ecoulement eaux usées sewage outflow verschmutzt desagua
 						
  3~400V + PE P: 10 kW						
  V03599 1/2-PRO800-B-E2-IND5000						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

