



HALF MODULE UNIT - 2 INDUCTION HOBS 2 x 5 KW

OPEN BASE

Pro 900

Summary

Energy :

ELEC

Code :

V03601

Designation :

B-E2IND5000

Dimensions (W x D x H) :

425 x 900 x 900 mm

Power : 10 kW (elec)

Voltage/Electric p. : 3~400V+N+E / 10

Weight :

DEVICE DESCRIPTION

General description

Chassis :

One-piece seam welded 18-10 stainless steel chassis,
1,5 to 3 mm thick, assembled by high intensity electrical welds and lower rear step for passage of cables and supply tubes.

Top :

Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in 18-10 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

Natural gas flow G20/20 :

Propane gas flow G31/37 :



Above :

- . 1 set of 2 induction hotplates (diameter 220 mm per hotplate for container diameter 120 mm minimum) under plate flush glass ceramic 325 x 650 mm, thickness 6 mm.
- . Mounting of burners / generators on a slide to facilitate access during maintenance operations.
- . Front controls by potentiometers with stop positions, graduated marks from 1 to 12.

- . Indicator lights for operation and possible faults.

Below :

- . Open base with removable AISI304 stainless steel floor.
- . Power: 2 x 5 kW in 3 / 400V + N + E.

OPTIONS

CODE




Hinged doors for open base	V01980
Power 2 x 3,5 Kw	V03630
S/S rear panel fitted in factory W : 415 x H : 645 mm	V01181

ACCESSORIES

CODE

S/S clip on plinth panels H : 170 mm for standard legs	V01186

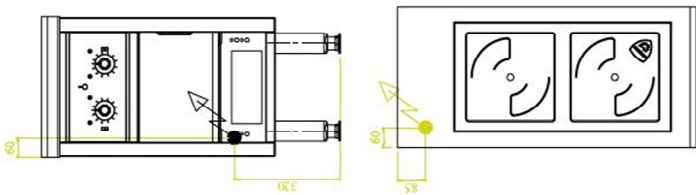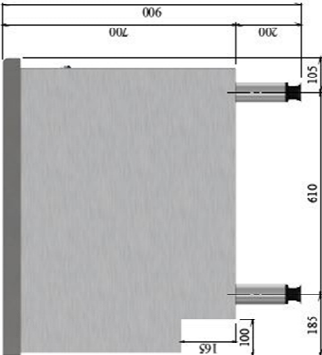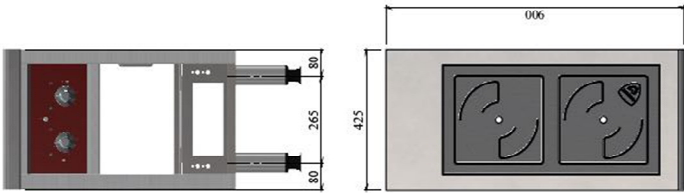

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Options Aufträge Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie Softened water connection Softened water connection Wasserzulauf (gefiltertes Wasser) ≤ 3 bars-ab: 7"GH Conexión agua blanda ≤ 3 bars-ab: 7" F	 Ecoulement eaux usées sewage outflow Wasserablauf desague
						
						
						
						
- 3~ 400 V + PE Ø 2.50mm²						
V03601 PRO900-1/2-B-E2-IND5000						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr

