



FULL MODULE - INDUCTION HOBS 4 x 5 kW

BODY : 500 mm HIGH

AERO Gam

Summary

Energy :

ELEC

Code :

V03609

Designation :

C-E4IND5000

Dimensions (W x D x H) :

1000 x 1000 x 900 mm

Power : 20 kW (elec)

Voltage/Electric p. : 3-400V+N+E

Weight :

DEVICE DESCRIPTION

General description

Chassis :

chassis : one-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electric welds.

Top :

18-10 stainless steel top frame, 3 mm thick, with an edge of 55 mm high and return.

Feet :

400 mm high stainless steel legs with adjustable PVC feet (0/+40 mm), diam : 60 mm



Above :

- . 2 sets of 2 induction hotplates (220 mm diameter per hotplate for minimum 120 mm diameter container) under 2 flush glass-ceramic plates 325 x 650 mm, 6 mm thick.
- . Mounting of burners / generators on a slide to facilitate access during maintenance operations.
- . Front controls by potentiometers with stop positions, graduated marks from 1 to 12.
- . Indicator lights for operation and possible faults.

Below :

- . Open base with removable AISI304 stainless steel floor in 2 parts.
- . Power: 4 x 5 kW in 3 / 400V + N + E.

Natural gas flow G20/20 :

Propane gas flow G31/37 :

OPTIONS

CODE






S/S rear panel fitted in factory - W : 990 x H : 445 mm

V01290

ACCESSORIES

CODE

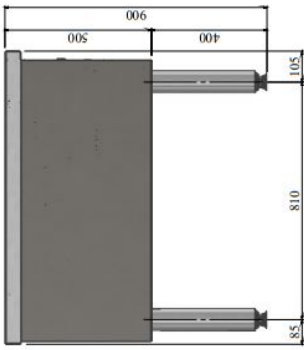

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica	 Options Options Ausrüstungen Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie Softened water connection Enthärtetes Wasser Conexión agua blanda $\leq 3 \text{ bars} \cdot \text{h} \cdot ^\circ\text{F}$ $\leq 3 \text{ bars} \cdot \text{h} \cdot ^\circ\text{F}$ Wasser $\leq 3 \text{ bars} \cdot \text{h} \cdot ^\circ\text{F}$ Conexión agua blanda	 Ecoulement eaux usées sewage outflow Abwasserablauf desagüe
 						
 						
						
    						
3~400V+N+PE - 4mm²						
V03609 AEROGAM1000E4IND						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr

