



ELECTRIC COOKING ELEMENTS - MULTIZONE

OPEN CUPBOARD

Pro 800

Summary

Energy :

ELEC

Code :

V03619

Designation :

B-E 4 IND-MULTI

Dimensions (W x D x H) :

1000 x 800 x 900 mm

Power : 14 kW (elec)

Voltage/Electric P. : 3-400V+N+E

Weight :

APPLIANCE DESCRIPTION

General description

Chassis :

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

Assembly by high intensity electric welding.

Top :

AISI 304 stainless steel top frame, 3 mm thick, with a 55 mm high edge and return to underside.

Legs :

200 mm high AISI 304 stainless steel legs, diam. : 60 mm. Adjustable PVC feet (0 / + 30).



Above : 4 zones 180 x 360 mm - unit power : 3.5 kW per zone - under 420 x 810 mm glass ceramic hob.

. Potentiometer and heat / fault indicator lights.

. 4 controls (1 per zone).

Below :

. Open base 1000 x 800 x 900 mm

Natural gas flow G20/20 :

Propane gas flow G31/37 :

OPTIONS

CODE

Plating shelf

V02067

S/S rear panel fitted in factory - W : 990 x H: 645 mm

V00887

Hinged doors for open base

V03631




ACCESSORIES

CODE

S/S clip on plinth panels - 170 mm for standard legs

V03633

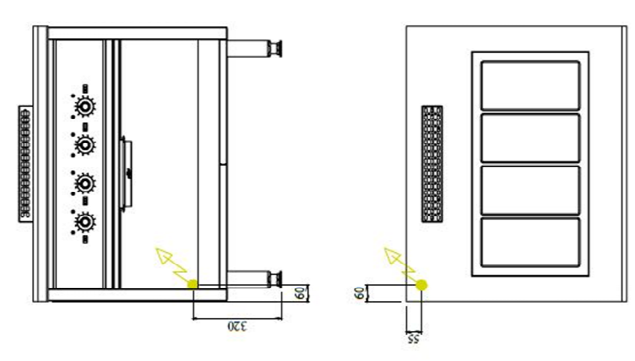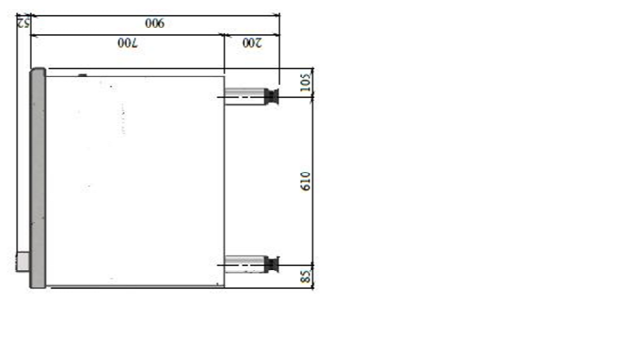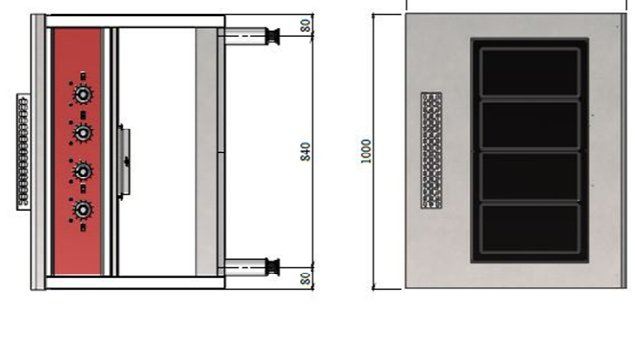

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Options Aufträge Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie Soft water connection Softened water connection ≤ 3bar-7°F Wasserzulauf (gefällertes wasser ≤ 3bar-7°F) Conexión agua blanda ≤ 3 bar-7°F	 Ecoulement eaux usées sewage outflow wasserablauf desague
						
						
						
						
3~400V+N+T - 4mm²						
V03619 PRO800-B-E4-IND-MULTI						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

