

1 SOLID TOP + 2 OPEN BURNERS

BRIDGE UNIT

GENERAL DESCRIPTION

- Top :
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under

- Chassis :
one-piece seam welded stainless steel chassis 2 mm thick duct at the back

- General :
AISI 304 side and front panels 1.2 mm thick
Enamel control panel
Chrome coated aluminium knob

Natural gas
G20/20 :

1.90 m3/h

Propane gas
G31/37 :

1.40 kg/h

REFERENCE : 80-R-G3PL/FN



APPLIANCE DESCRIPTION

Dimensions (mm) : W 800 x D 700 x H 280

- Top :
1 built-in solid top measuring 330 x 520
"Crown" burners rated 5 kW
. Refractory cement heat retention tray

2 "Crown" open burners 2x6.5 kW with 330x520 nickel coated pan support
. Removable spillage tray

Flame failure safety cut out thermocouple - pilot ignition - recessed low and high heat controls for each burner
Low stainless steel spillage tray

- Bridge unit






Gas rating : 18 kW

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07005	800 X 700 X 280 mm	-	GAS 18 kW	-

OPTIONS	CODE
Base unit 800 open	V07057
Base unit with 4xGN2/1 storage	V07058
Hinged doors	V07062
Electric hot cupboard in base 4 x GN2/1 (1-230V+E) - 1.13 kW	V07064
Electric ignition (1-230V+E)	V07067
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07084
-	-
-	-

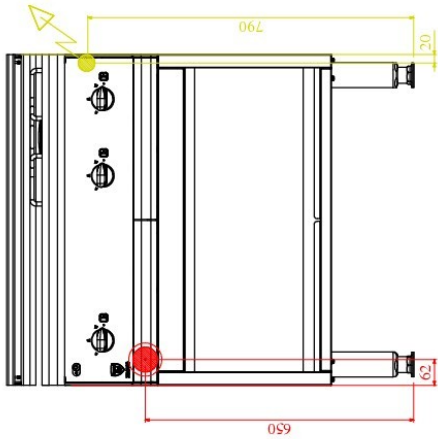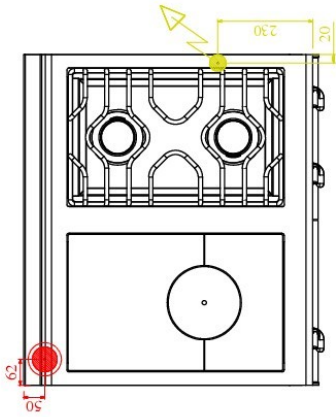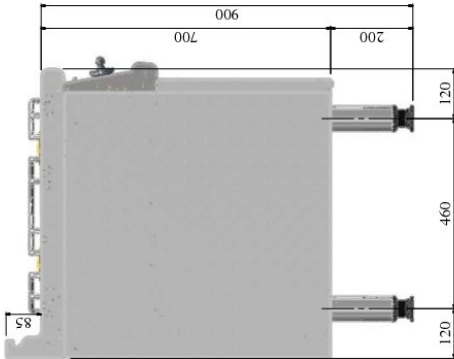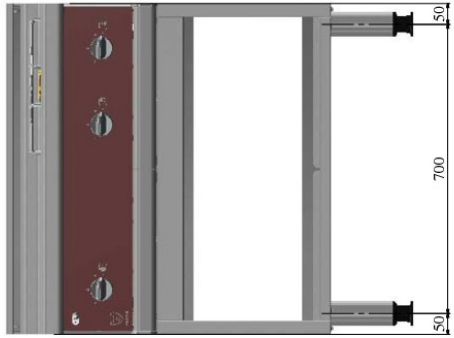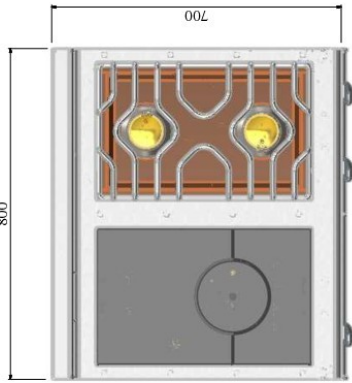

 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Options Auftrage Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie Softened water connection Wasserzulauf (gefiltertes wasser ≤ bars-ab. 7°GH) Conexión agua blanda ≤ 3 bars-L.h...7°F	 Écoulement eaux usées sewage outflow wasserablauf desagüe
						
					 Ø 15x21 (1/2")	 1 ~ 230 V + PE Ø 1.5 mm²
						V07005+V07066+V07057 PRO700-80-G3-PL-FN + SB1-PRO700-80-N + OPT-ALL-ELEC

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.